


CAR AND WELL PLAN

TECHNICAL SPECIFICATION FOR ELEVATOR									
Safety regulations		EN81		Acceleration/deceleration		0.4 m/s ²			
Elevator type		Goods Passenger		Motor nominal power		23.4 kW			
Elevator code		GM40/10-19		Line current, nominal		52.5 A			
Rated load		4000 kg		Line current, accel. max. peak		73.3 A			
Rated speed		1.0 m/s		Main switch fuse in m.room		36.63 A			
No. of stops / landing doors		6/6		Thermal losses in microom		3.2 kW			
Trolley		17550 mm		Power supply		3*400VAC/50Hz			
Group size		1		Separate lighting supply/fuse		no			
Installation method		Biframisys		Control system		LC2-M/PPB			
Version		Date		Change description		Drawn by		Appr. by	
Revised days: -		-01-2, -01-3, -03, -04, -05-1, -05-2							

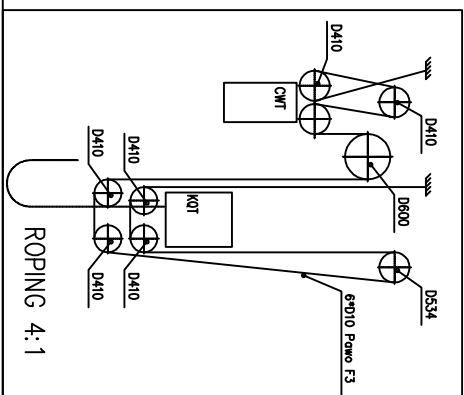

ROPING 4:1

Dept.	Date	Project title
IP	2007-11-09	Filharmonia Sverdłowsko
Designed by		Site address
IP/CI		Kielce
Checked by		Prog. title
Approved by		INSTALLATION LAZYOUT
—		
Element number(s) (ESU)		
—		
VI ref. no	Prog. no (ESU)	Version
—	—	en. - 1
		Page